


VF VEDAÇÃO E FIXAÇÃO LTDA.

ANÉIS PARA EIXO LISO TIPO G GRUPO 505

d_3 é o diâmetro do anel não tensionado

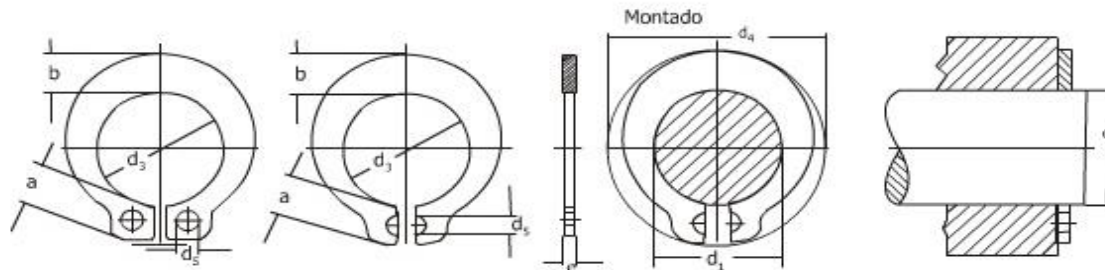

Os anéis do grupo 505 são fornecidos facultativamente numa das formas acima

Código VF para encomenda	d_1	ANEL							DADOS COMPLEMENTARES		
		e	d_3	Tol.	a max.	b ~ ~	d_5 min.	Peso Kg/1000	d_4	P (Kgf) carga axial	n. adm. (RPM)
505,015	1.5	0.4	1.40	$\pm 0,020$	1.7	0.7	0.9	0.013	5.1	4.0	350000
505,020	2.0	0.6	1.90	$\pm 0,020$	1.9	1.0	0.9	0.036	6.0	5.0	260000
505,022	2.2	0.6	2.05	$\pm 0,025$	1.9	1.1	0.9	0.038	6.2	5.0	270000
505,025	2.5	0.6	2.35	$\pm 0,030$	1.9	1.2	0.9	0.045	6.5	6.0	220000
505,028	2.8	0.6	2.65	$\pm 0,035$	2.0	1.3	0.9	0.057	7.0	7.0	190000
505,030	3.0	0.6	2.85	$\pm 0,040$	2.1	1.4	0.9	0.065	7.4	7.5	170000
505,035	3.5	0.6	3.30	$\pm 0,050$	2.3	1.6	1.2	0.081	8.3	9.0	150000
505,040	4.0	0.8	3.80	$\pm 0,060$	2.7	1.8	1.2	0.154	9.6	10	125000
505,045	4.5	0.8	4.25	$\pm 0,060$	2.9	2.0	1.3	0.173	10.5	12	120000

505,050	5.0	0.8	4.75	±0,075	2.9	2.2	1.3	0.200	11.0	13	10000
505,055	5.5	0.8	5.20	±0,090	3.0	2.2	1.3	0.216	11.7	15	90000
505,060	6.0	1.00	5.70	±0,090	3.2	2.4	1.4	0.402	12.6	17	81000
505,070	7.0	1.00	6.70	±0,090	3.4	2.7	1.4	0.428	14.0	18	63000
505,080	8.0	1.00	7.70	±0,090	3.5	3.0	1.4	0.524	15.2	20	52000
505,090	9.0	1.20	8.65	±0,090	4.7	3.3	2.0	0.808	18.6	23	46000
505,100	10.0	1.20	9.65	±0,110	4.7	3.5	2.0	0.944	19.6	25	39000
505,105	10.5	1.20	10.20	±0,110	4.0	3.8	1.5	1.100	18.7	26	34000
505,110	11.0	1.20	10.60	±0,110	4.8	4.2	2.0	1.208	20.8	28	37000
505,120	12.0	1.20	11.60	±0,110	4.8	4.6	2.0	1.454	21.8	30	33000
505,130	13.0	1.20	12.55	±0,110	5.3	5.0	2.0	1.750	23.8	32	31000
505,138	13.8	1.50	13.30	±0,110	5.1	5.4	2.2	2.492	24.8	35	30000
505,140	14.0	1.50	13.50	±0,110	5.1	5.4	2.2	2.456	25.0	35	29000
505,150	15.0	1.50	14.50	±0,110	5.1	5.6	2.2	2.716	26.4	40	26000
505,160	16.0	1.50	15.40	±0,110	5.6	5.8	2.5	2.940	27.8	50	26000
505,170	17.0	1.75	16.35	±0,110	6.0	6.2	2.5	4.010	29.6	60	24000
505,180	18.0	1.75	17.30	±0,110	6.1	6.6	2.5	4.460	31.4	70	23000
505,200	20.0	1.75	19.30	±0,130	6.1	7.1	2.5	5.270	34.4	70	20000
505,220	22.0	1.75	21.20	±0,130	6.6	7.4	2.5	6.060	37.0	75	18000
505,240	24.0	1.75	23.15	±0,130	6.6	7.8	2.5	7.000	39.8	75	16000
505,250	25.0	1.75	24.15	±0,130	6.6	8.2	2.5	7.450	41.6	75	15000

Utilizar Códigos em **AZUL** preferencialmente.

Reservamo-nos ao direito de modificação das dimensões acima sem consulta prévia.

|