


VF VEDAÇÃO E FIXAÇÃO LTDA.

PINO GUIA ISO 8734 DIN 6325

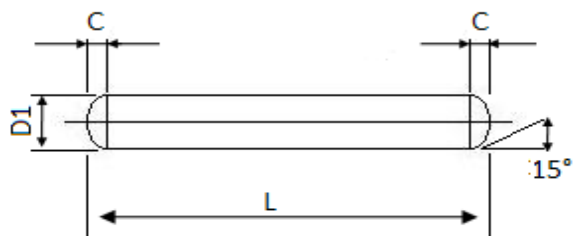

D1			2.00	2.50	3.00	4.00	5.00	6.00	8.00	10.00	12.00	16.00	20.00
M6													
C			0.35	0.40	0.50	0.63	0.80	1.20	1.60	2.00	2.50	3.00	3.50
L													
Nominal	Min.	Max.											
8	7.75	8.25											
10	9.75	10.25											
12	11.50	12.50											
14	13.50	14.50											
16	15.50	16.50											
18	17.50	18.50											
20	19.50	20.50											
22	21.50	22.50											
24	23.50	24.50											
26	25.50	26.50											
28	27.50	28.50											
30	29.50	30.50											
32	31.50	32.50											
35	34.50	35.50											
40	39.50	40.50											
45	44.50	45.50											
50	49.50	50.50											
55	54.25	55.75											
60	59.25	60.75											
65	64.25	65.75											
70	69.25	70.75											
75	74.25	75.75											
80	79.25	80.75											
85	84.25	85.75											
90	89.25	90.75											
95	94.25	95.75											
100	99.25	100.75											

Tolerância h8 e h11 sob consulta.